



SL-301 Series

SLIDE SWITCH



SL-301





SL-301

Specification:

8(2)A 250VAC T85
3(1)A 250VAC



3A	250VAC	T125
6A	125VAC	T125
6.5A	250VAC	T125
13A	125VAC	T125
7.5A	250VAC	T125
15A	125VAC	T125

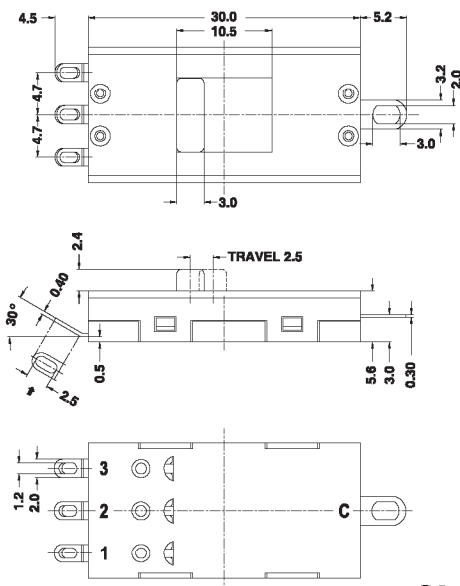

CIRCUIT DIAGRAM

SL - 301 —

001 M 1 S

Circuit	Current	Knob Type	Terminal & Spring Type	Internal Use Only
001	S 3(1)A 250VAC	1	S (Terminal 1, 2, 3) (Terminal C)	Internal Use Only
002	6A 125VAC			
003	M 8(2)A 250VAC	P	P (Terminal 1, 2, 3) (Terminal C)	
004	13A 125VAC			
005	L 8(2)A 250VAC			
006	15A 125VAC			
007				
008				
009				
More				

CIRCUIT: 001	CIRCUIT: 002	CIRCUIT: 003	CIRCUIT: 004	CIRCUIT: 005	CIRCUIT: 006																																																												
<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+1</td></tr> <tr><td>3</td><td>C+2</td></tr> <tr><td>4</td><td>C+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+1	3	C+2	4	C+3	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+1+2+3</td></tr> <tr><td>3</td><td>C+2+3</td></tr> <tr><td>4</td><td>C+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+1+2+3	3	C+2+3	4	C+3	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+3</td></tr> <tr><td>3</td><td>C+2+3</td></tr> <tr><td>4</td><td>C+1+2+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+3	3	C+2+3	4	C+1+2+3	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+2</td></tr> <tr><td>3</td><td>C+1+2</td></tr> <tr><td>4</td><td>C+1+2+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+2	3	C+1+2	4	C+1+2+3	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+3</td></tr> <tr><td>3</td><td>C+1+2</td></tr> <tr><td>4</td><td>C+1+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+3	3	C+1+2	4	C+1+3	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+1+3</td></tr> <tr><td>3</td><td>C+2+3</td></tr> <tr><td>4</td><td>C+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+1+3	3	C+2+3	4	C+3
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+1																																																																
3	C+2																																																																
4	C+3																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+1+2+3																																																																
3	C+2+3																																																																
4	C+3																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+3																																																																
3	C+2+3																																																																
4	C+1+2+3																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+2																																																																
3	C+1+2																																																																
4	C+1+2+3																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+3																																																																
3	C+1+2																																																																
4	C+1+3																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+1+3																																																																
3	C+2+3																																																																
4	C+3																																																																
CIRCUIT: 007	CIRCUIT: 008	CIRCUIT: 009	CIRCUIT: 010	CIRCUIT: 011	CIRCUIT: 012																																																												
<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+1</td></tr> <tr><td>3</td><td>C+1+2</td></tr> <tr><td>4</td><td>C+2</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+1	3	C+1+2	4	C+2	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+1</td></tr> <tr><td>3</td><td>C+1+2</td></tr> <tr><td>4</td><td>C+1+2+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+1	3	C+1+2	4	C+1+2+3	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+1</td></tr> <tr><td>3</td><td>C+2+3</td></tr> <tr><td>4</td><td>C+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+1	3	C+2+3	4	C+3	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+3</td></tr> <tr><td>3</td><td>C+1+2</td></tr> <tr><td>4</td><td>C+1</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+3	3	C+1+2	4	C+1	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+3</td></tr> <tr><td>3</td><td>C+2+3</td></tr> <tr><td>4</td><td>C+2+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+3	3	C+2+3	4	C+2+3	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+1</td></tr> <tr><td>3</td><td>C+2</td></tr> <tr><td>4</td><td>NIL</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+1	3	C+2	4	NIL
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+1																																																																
3	C+1+2																																																																
4	C+2																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+1																																																																
3	C+1+2																																																																
4	C+1+2+3																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+1																																																																
3	C+2+3																																																																
4	C+3																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+3																																																																
3	C+1+2																																																																
4	C+1																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+3																																																																
3	C+2+3																																																																
4	C+2+3																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+1																																																																
3	C+2																																																																
4	NIL																																																																
CIRCUIT: 013	CIRCUIT: 014	CIRCUIT: 015	CIRCUIT: 016	CIRCUIT: 017	CIRCUIT: 018																																																												
<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>C+3</td></tr> <tr><td>2</td><td>C+1</td></tr> <tr><td>3</td><td>NIL</td></tr> <tr><td>4</td><td>C+1+2</td></tr> </table>	POSITION	CONNECTED	1	C+3	2	C+1	3	NIL	4	C+1+2	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+1+3</td></tr> <tr><td>3</td><td>C+1+3</td></tr> <tr><td>4</td><td>C+2+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+1+3	3	C+1+3	4	C+2+3	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>C+3</td></tr> <tr><td>3</td><td>C+3</td></tr> <tr><td>4</td><td>C+1+3</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	C+3	3	C+3	4	C+1+3	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>NIL</td></tr> <tr><td>2</td><td>NIL</td></tr> <tr><td>3</td><td>C+2</td></tr> <tr><td>4</td><td>C+1+2</td></tr> </table>	POSITION	CONNECTED	1	NIL	2	NIL	3	C+2	4	C+1+2	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>C+1</td></tr> <tr><td>2</td><td>C+1+2+3</td></tr> <tr><td>3</td><td>C+1+2</td></tr> <tr><td>4</td><td>NIL</td></tr> </table>	POSITION	CONNECTED	1	C+1	2	C+1+2+3	3	C+1+2	4	NIL	<table border="1"> <tr><th>POSITION</th><th>CONNECTED</th></tr> <tr><td>1</td><td>C+1</td></tr> <tr><td>2</td><td>NIL</td></tr> <tr><td>3</td><td>C+2</td></tr> <tr><td>4</td><td>C+1+2+3</td></tr> </table>	POSITION	CONNECTED	1	C+1	2	NIL	3	C+2	4	C+1+2+3
POSITION	CONNECTED																																																																
1	C+3																																																																
2	C+1																																																																
3	NIL																																																																
4	C+1+2																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+1+3																																																																
3	C+1+3																																																																
4	C+2+3																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	C+3																																																																
3	C+3																																																																
4	C+1+3																																																																
POSITION	CONNECTED																																																																
1	NIL																																																																
2	NIL																																																																
3	C+2																																																																
4	C+1+2																																																																
POSITION	CONNECTED																																																																
1	C+1																																																																
2	C+1+2+3																																																																
3	C+1+2																																																																
4	NIL																																																																
POSITION	CONNECTED																																																																
1	C+1																																																																
2	NIL																																																																
3	C+2																																																																
4	C+1+2+3																																																																

For more circuit options, please call factory.